



Vibratory Compaction Guidelines

Apply down-pressure, vibrate about 15 seconds, then move and repeat, make two passes over area.

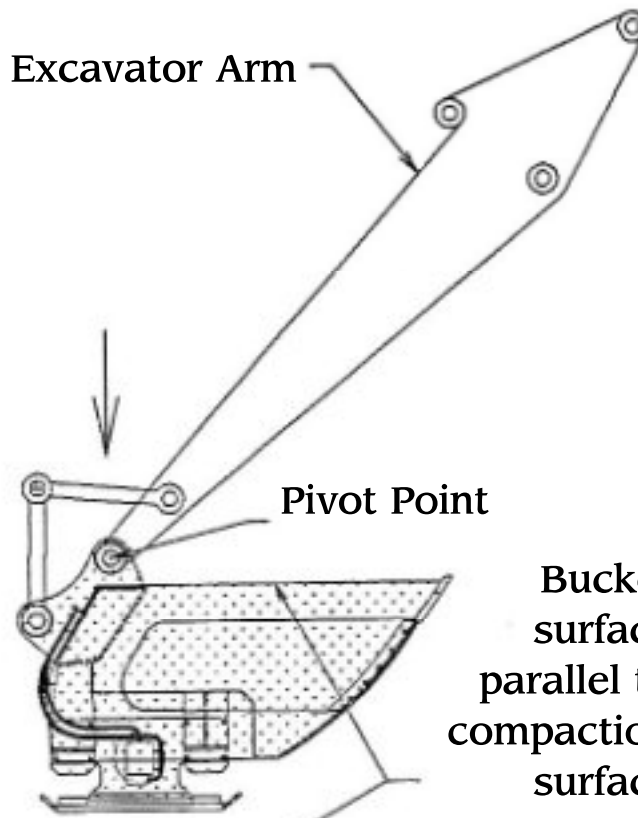

Bucket surface parallel to compaction surface

Typically compacts lifts from 1'-5' depending on material type and moisture content.

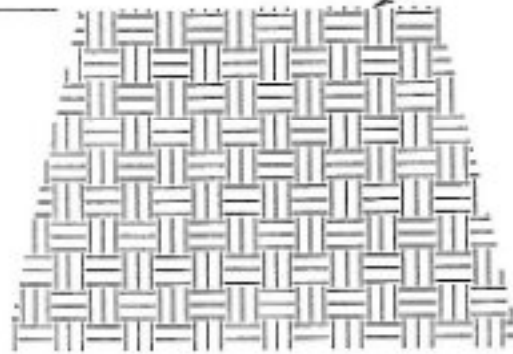

Note: Start compaction near edge of previously compacted area.

Slope compaction can be accomplished by making similar steps up the slope starting at the bottom.



Felco Industries, LTD.
www.felco-ind.com